


For full installation instructions download from <http://www.oursplashlights.com/downloads.html>

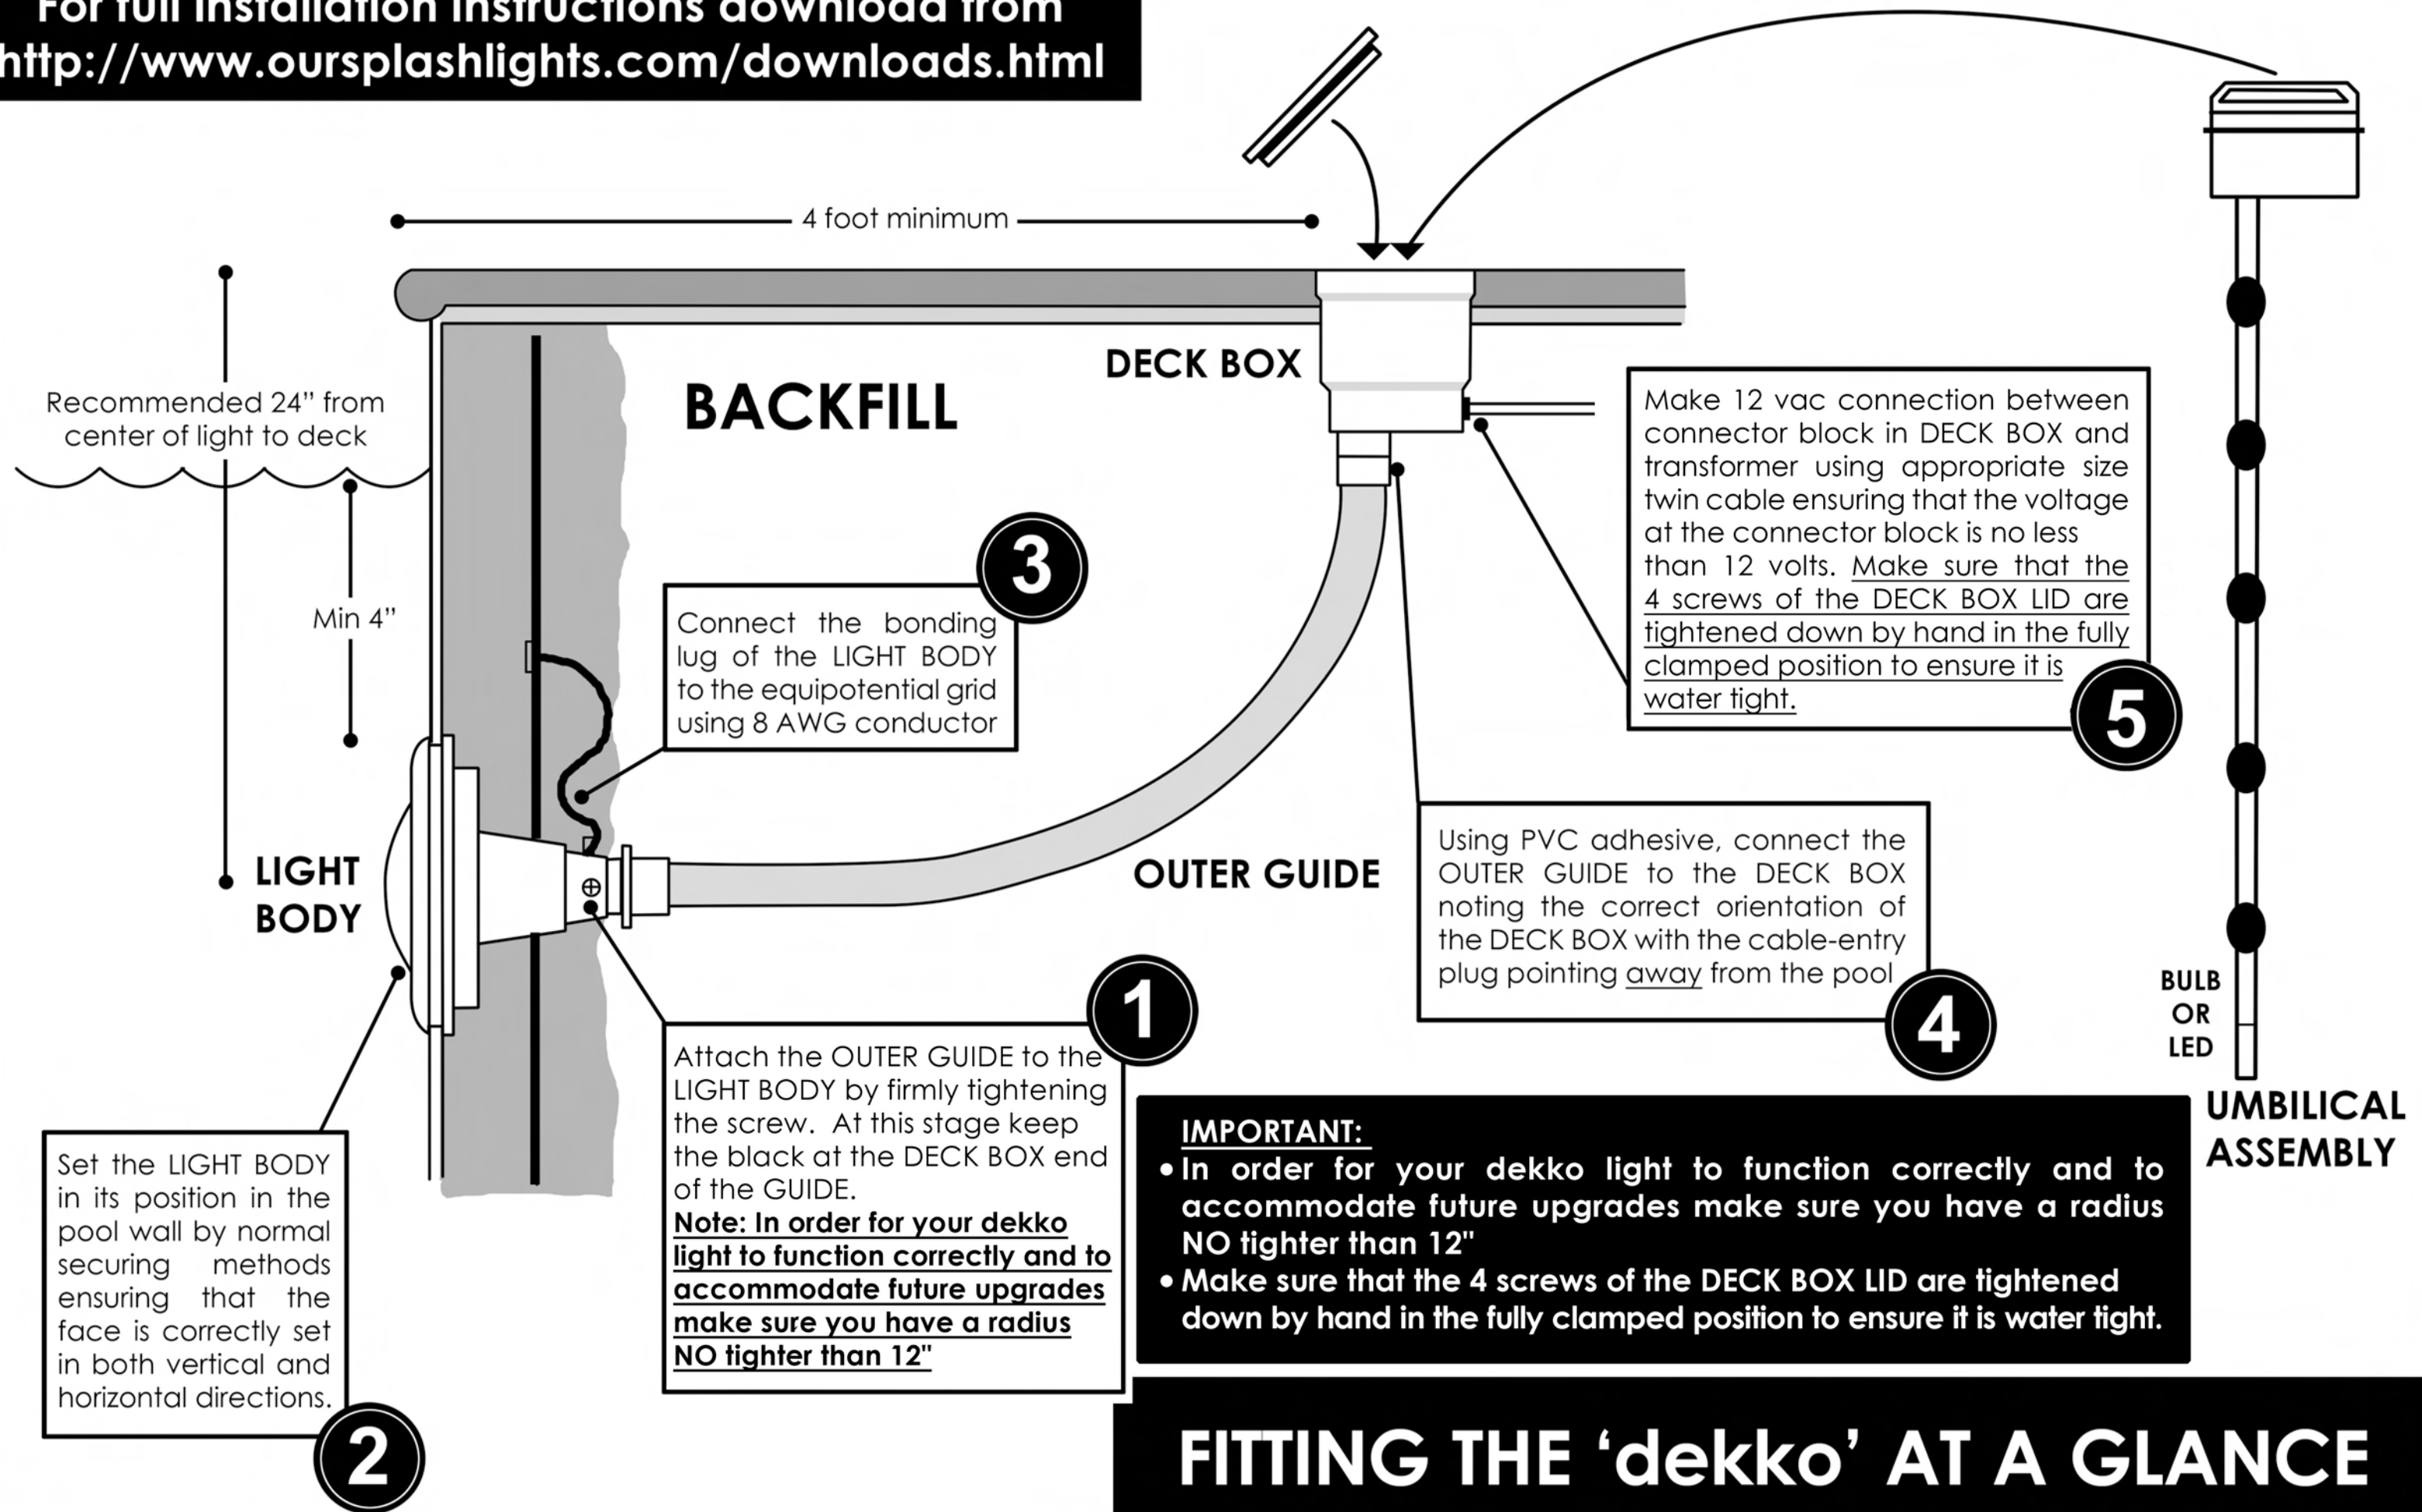

....at a glance

What's in the box

There are up to 6 parts to the dekho pool lighting system.

1. The light unit (with red installation shield if using concrete).
2. The deck box.
3. The outer guide.
4. The umbilical assembly.
5. The fascia (ASA plastic or 316 stainless steel) with protective cover
6. Vinyl or fiber-glass adapter kit (if applicable)

What you have to do

Download (www.ourslasheslights.com/downloads) the full installation & owners manual for detailed instructions and N.E.C. requirements.

See diagram over page for at-a-glance instructions

Connections you have to make

See instruction manual for details and NEC requirements.

1. Using the tap/run & voltage drop chart in the manual run a (2) conductor 12VAC supply cable between transformer and the deck box
2. Connect the supply cable to the 'dekko' through the 3/4" NPT cable entry-point and connect to the connector block in the deck box
3. Using an approved product, install non-setting potting compound around the connections and cable entry point.

Finally....

1. Set the final position of the deck box no less than 48" from the pool
2. Remove the entry cover (inside the deck box) protecting the outer guide from debris
3. Insert the umbilical assembly pressing the handle down to finally position the bulb or LED into the light body.
4. Replace the deck box lid

NOW READ THE PRECAUTIONS.

PRECAUTIONS

1. Ensure all components are properly located
2. Ensure good bonding connections
3. Ensure the voltage to the deck box is no less than 12.0 volts. Connect to a higher voltage tap in the transformer if necessary
4. Ensure the 'O' rings are kept clean at all times and that they are kept lubricated and are properly seated.
5. Do not allow debris to fall into the deck box lid screw holes as it will interfere with seating of the lid and water barrier
6. Keep the outer guide cap in place in the deck box until ready to insert the umbilical assembly to avoid debris entering the outer guide
7. Ensure the handle of the umbilical assembly is fully located, to seat the bulb/LED and allow the deck box lid to compress the 'O' ring
8. **IMPORTANT** - Fasten the deck box lid down until the ALL (4) screws are fully seated

Now Test the light